



● PCB MOUNTING LEDs - Ø 5mm

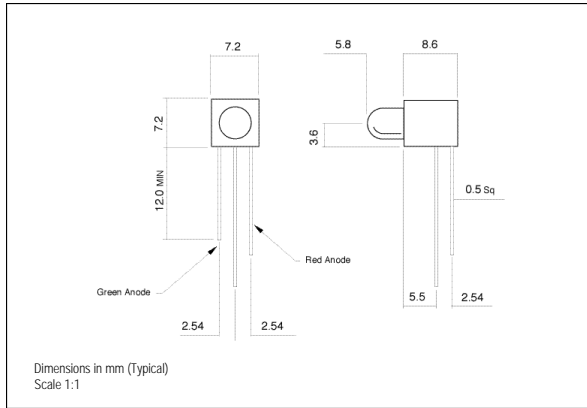

- Independent addressability enhances drive circuit options for tri-colour status indication
- Reverse polarity options available



151 SERIES

MLQ = 100




Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY Iv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
STANDARD INTENSITY									
151-535-04	Red/Green	White Diffused	2.0/2.2*	20	50/50	625/565	Wide	-40 ~ +80	-40 ~ +80
UNITS			Vdc	mA	mcd	nm		°C	°C

* = Voltage DC for 20mA product is Vf@20mA, not Vopr

Please note - For Tri-colour operation the maximum combined currents should not exceed 20mA

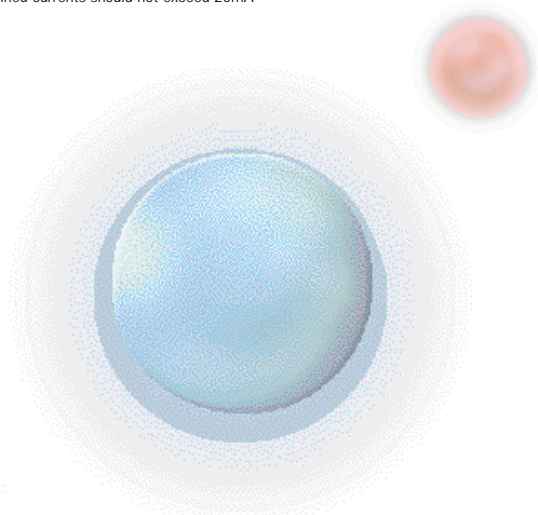

● LED PRODUCTS CAN BE STATIC SENSITIVE