


● PCB MOUNTING LEDs - Ø 3mm



- Ideal for auto-insertion
- Low current models available
- Reverse polarity options

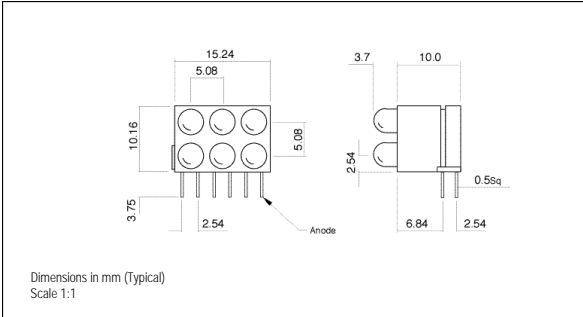

123 SERIES

MLQ = 50



Ordering Information & Typical Technical Characteristics (Ta = 25°C)

Mean Time Between Failure = 100,000 Hours. Low Current Models 250,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC Vopr	CURRENT DC Iopr	LUMINOUS INTENSITY lv@20mA	WAVE LENGTH p	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
<b>STANDARD INTENSITY</b>									
123-305-01	Red	Coloured Diffused	2.0	2	35	625	Wide	-40 ~ +80	-40 ~ +80
123-311-01	Yellow		2.1	2	20	590			
123-314-01	Green		2.2	2	20	565			
123-305-04	Red		2.0*	20	35	625			
123-311-04	Yellow		2.1*	20	20	590			
123-314-04	Green		2.2*	20	20	565			
123-330-04	Red/Green	White Diffused	2.0/2.2*	20	25/25	625/565			
<b>UNITS</b>			<b>Vdc</b>	<b>mA</b>	<b>mcd</b>	<b>nm</b>		<b>°C</b>	<b>°C</b>

\* = Voltage DC for 20mA product is Vf@20mA, not Vopr

Please contact our Sales office for multi-colour array part numbers.



*Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You!*

● CUSTOM DESIGN SERVICE